


# BEYONDTEK, INC. BTC-16205B

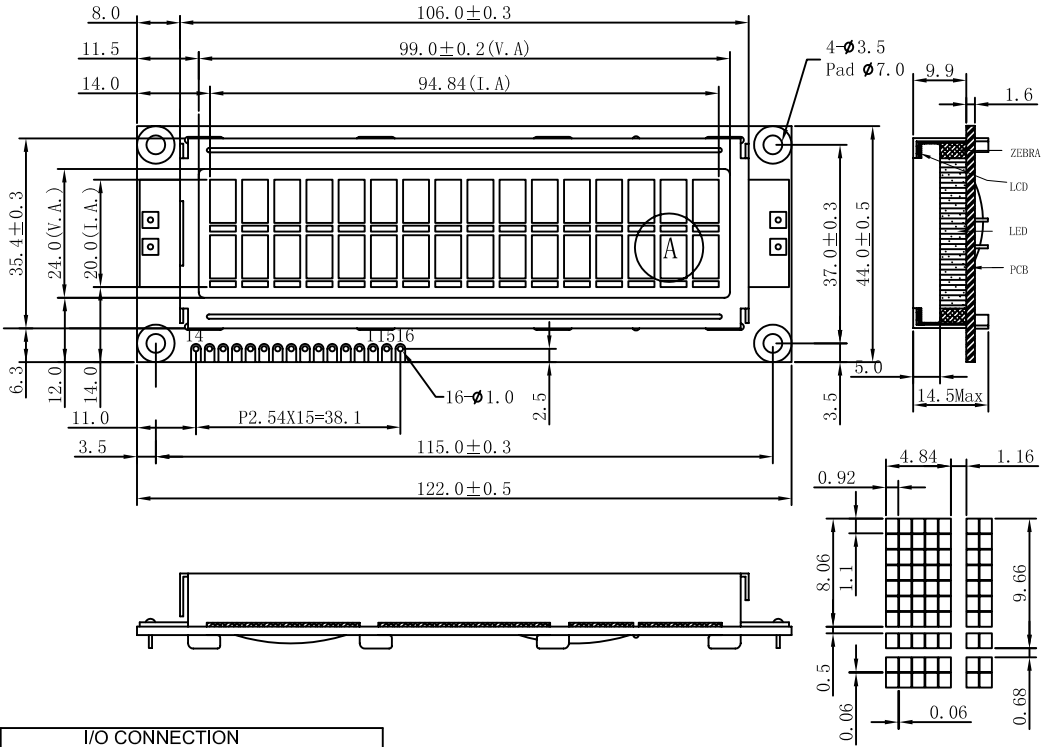

A Block

I/O CONNECTION		
Pin No	Symbol	Function
1	VSS	Power supply (GND)
2	VDD	Power supply (+)
3	V0	Power supply for LCD
4	RS	Register select signal
5	R/W	Read/write select signal
6	E	Enable signal
7	DB0	Data bus line
8	DB1	Data bus line
9	DB2	Data bus line
10	DB3	Data bus line
11	DB4	Data bus line
12	DB5	Data bus line
13	DB6	Data bus line
14	DB7	Data bus line
15	LED_A	Power supply for LED (+)
16	LED_K	Power supply for LED (-)

NOTE: 1 TOLERANCES UNLESS OTHERWISE SPECIFIED: ±0.25mm  
 2 ALL DIMENSIONS ARE IN mm  
 3 VIEWING ANGLE: 6 O'CLOCK  
 4 MULTIPLEX LEVEL: 1/16 DUTY, 1/5 BIAS  
 5 DISPLAY MODE: STN(YELLOW-GREEN/GRAY/BLUE) & FSTN  
 6 POLARIZER REFLECTIVE: TRANSFLECTIVE/ POSITIVE  
 7 CONNECTORS: ZEBRA  
 8 DATA TRANSFER: 8-BIT PARALLEL DATA TRANSFER  
 9 BACKLIGHT: LED  
 10 COLOR OF BACKLIGHT: YELLOW-GREEN/WHITE

ABSOLUTE MAXIMUM RATING					
ITEM	Symbol	Condition	Min	Max	Units
Power supply for logic	Vdd-Vss	25°C	-0.3	7.0	V
Operating voltage for LCD	Vdd-V0	25°C	Vdd-12	Vdd+0.3	V
Input voltage	Vin	25°C	-0.3	Vdd+0.3	V
Operating temperature	Top	-	-20	70	°C
Storage temperature	Tstg	-	-25	80	°C

ELECTRO-OPTICAL CHARACTERISTICS						
ITEM	Symbol	Condition	Min	Typ	Max	Units
Power supply for logic	Vdd-Vss	25°C	4.5	5.0	5.5	V
LCM current consumption(No B/L)	I <sub>d</sub>	Vdd=5V	-	-	1.0	mA
Operating voltage for LCD	Vdd-V0	-20°C	4.7	5.0	5.3	V
		25°C	4.7	5.0	5.3	V
		70°C	4.7	5.0	5.3	V
Backlight current consumption	I <sub>Led</sub>	V <sub>B/L</sub> =5.0V	-	240	-	mA

