

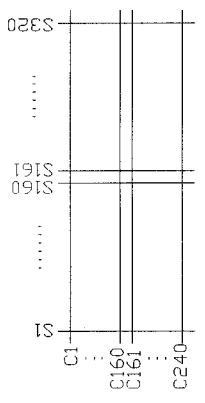



Terminal No.	Pin Name
1	VOUT
2	V0
3	NC
4	VDD
5	VSS
6	D0
7	D1
8	D2
9	D3
10	/DISPFF
11	LP
12	M
13	CP
14	FLM
15	BLA
16	BLK



Components Height

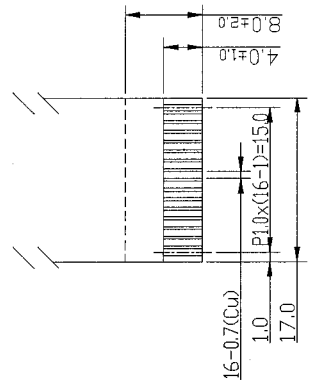

- Note:
- \*1. Display Type : FSTN, Positive, Transflective
  - \*2. Viewing Direction : 9H
  - \*3. Duty : 1/240, Bias : 1/12
  - \*4. Backlight Color : White
  - \*5. Operating Voltage : 3.3V
  - \*6. Operating Temperature : -10°C~60°C
  - \*7. Storage Temperature : -20°C~70°C
  - \*8. An external VR(25K to 50K) must be connected for Contrast Control
  - \*9. Environmental Safe Standard : RoHS

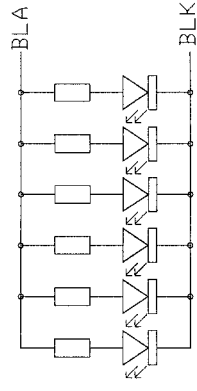

C					
B					
A	- Revise	Dimension			Lin Yan 2006-10-12
Rev/Note		Dwg title		Date	
		BTG-322455G-WT9SLW			
Dwg No.		MK-001435a-1-1		Date	
Scale		3/2		Unit	
		±0.5		Paper	
		A3		Size	
Approved		Checked		Drawn	
				Lin Yan	

BeyondTek, Inc.